



料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Length (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strength (kg)	Hole Diameter (mm)	Panel Thickness (mm)	相关认证
31-E24-GTRP-175HD	插槽可退式束线带	GTRP-175HD	175	8.0	38	22.2	7.5	1.0~2.2	

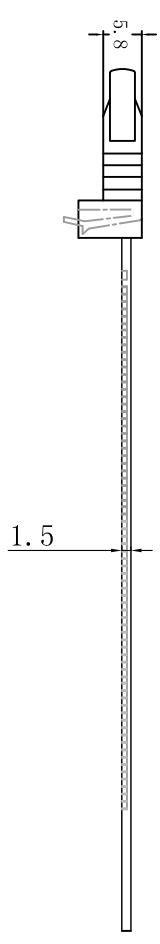

产品说明：适合工业及一般家电产品之电源线捆绑及固定用；先将机板钻孔，然后把扎带插入孔径，再将电线扎紧即可。  
 材质：尼龙，UL耐燃等级94V-2  
 颜色：白色（各种颜色皆可定制）  
 公差：L±5  
 带\*为管控尺寸

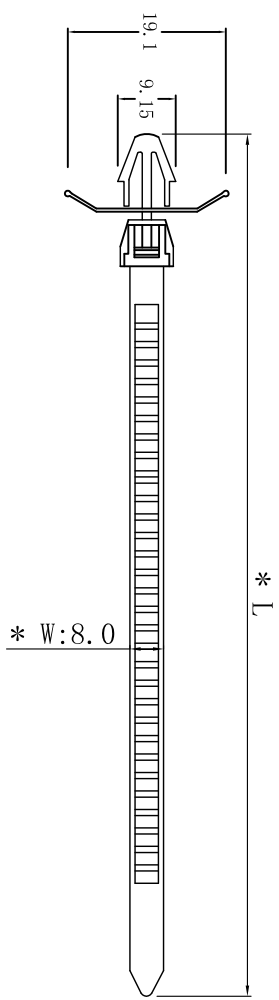

DIMENSION	TOLERANCES	PRIST ANGLE PROJ			
0.0 0.00	±0.50				
		A	NEW PART	REVISION RECORD	LTR.
			<i>allucian</i>	DWG. BY	
			<i>zy-wang</i>	CHK. BY	
			<i>2023/10/8</i>	DATE	
DWG. BY	<i>lva liang</i>	UNIT	mm		
CHK. BY	<i>allucian</i>	REV.	A		
APP. BY	<i>wang shuyuan</i>	DWG. NO.	HIMA/QR-JZ-31-E24-GTRP-175HD		

未经授权不得修改和复印  
 该知识产权属于技术质量部

HIMA 惠华苏州惠华电子科技有限公司