


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Length (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strength (kg)	适用机板孔径	适用机板厚度
31-HIWA-RQX-210L-B	螺旋式头束线带	RQX-210L黑	210	5.5	45	22.2	6.5-7.0	0.8-4.5



材质: 采用UL认证尼龙66, 耐水等级94V-2, 耐酸、耐碱、免
 染性好, 不老化, 承受力强。
 温度: 可达85℃。
 颜色: 黑色;

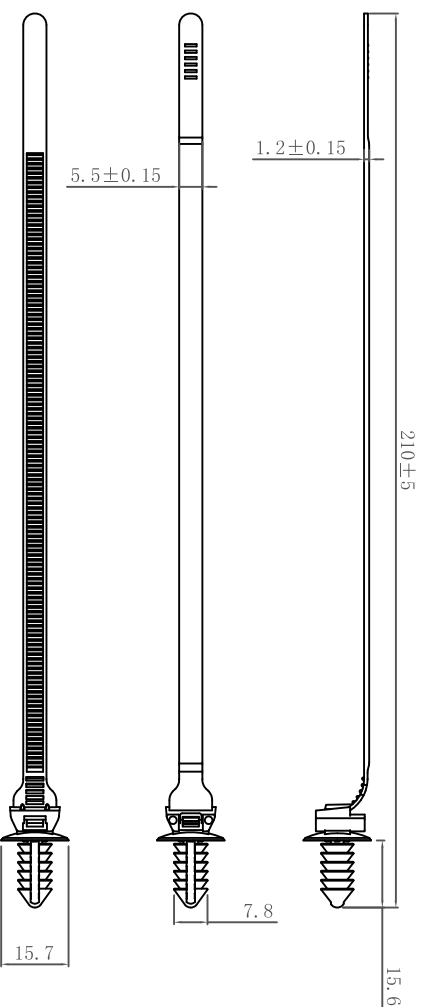

DIMENSION	TOLERANCES	REVISION RECORD				DATE	DWG. BY			CHK. BY		
		LTR.	NEW PART	DWG. BY	CHK. BY		APP. BY	UNIT	REV.	DWG. NO.	UNIT	REV.
0.0	±0.5	A	NEW PART	<i>wullivan</i>	<i>zy wang</i>	<i>202108</i>	<i>liu liang</i>	mm				
0.00							<i>wullivan</i>				A	
FIRST ANGLE PROJ							APP. BY		DWG. NO.			
							<i>wang zhiqian</i>		HIWA/QR-JZ-31- HIWA-RQX-210L-B			

未经授权不得修改和复印
 该知识产权属于技术质量部

苏州惠华电子科技有限公司