



料号 Part NO.	品名 Parts Name	规格
41-F01-PC301	灯具连接器	PC301

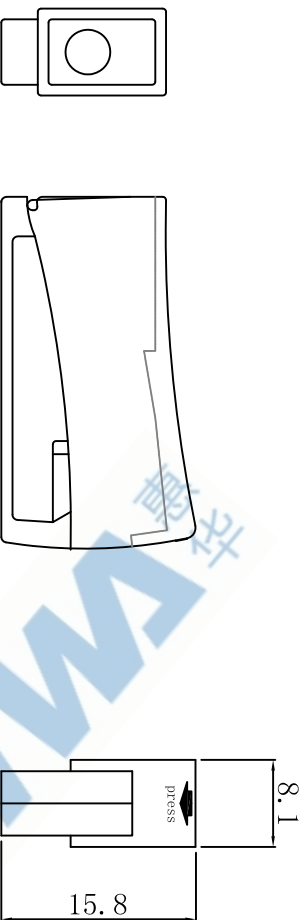

Housing Material: Polyamide 66, grey and white flame-retardant to UL 94V-2
 Current: 30A (UL), 24A (VDE)
 Voltage: 600V (UL), 450V (VDE)
 Working Temp: 100°C
 Wire Range: Installation side: 0.75-2.5mm², sol, #18-#16 AWG, Sol
 Lighting side: 0.5-2.5mm², sol/Str, #18-#16 AWG, Sol/Str Cu
 Stripping Length: 9-11mm (0.35-0.43inch)



未经受权不得修改和复印
 该知识产权属于技术质量部;

DIMENSION	TOLERANCES												
.0	±0.3												
FIRST ANGLE PROJ		A	NEW PART	<i>wallian</i>	<i>ya wang</i>	<i>2024/10</i>							
		LTR.	REVISION RECORD	DWG. BY	CHK. BY	DATE							
DWG. BY	<i>lin liang</i>	UNIT	mm										
CHK. BY	<i>wallian</i>	REV.	A										
APP. BY	<i>wang zhiyan</i>	DWG. NO.	HIMA/QR-1Z-41-F01-PC301										