








认证	   	
型号	250	260
电气性能		
电压 (V)	450	450
电流 (A)	16	20
额定连接容量 (mm ²)	2.5	4
美规线号 (AWG)	14	12
材料		
塑料件	聚酰胺66 UL94V-2等级	
夹紧件	合金铜 (电镀)	
接线螺钉	铁 (镀锌)	
环境温度	T-40°C ~ T110°C	
极数	2P—12P	
尺寸 (mm)		
a	116.5	139.5
b	16.2	18
c	20.5	23.5
d	33.5	37.15
e	3.2	4.2
f	10	12
g	118.9	142
h	42	48


竖插结构





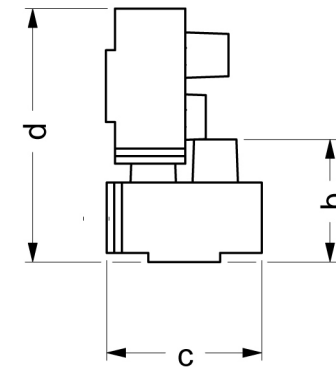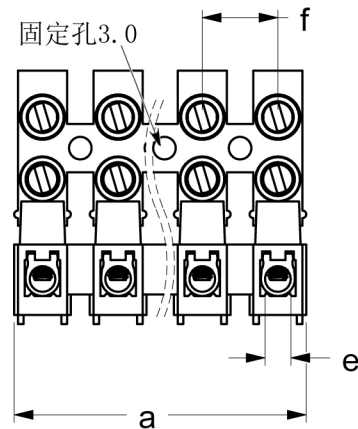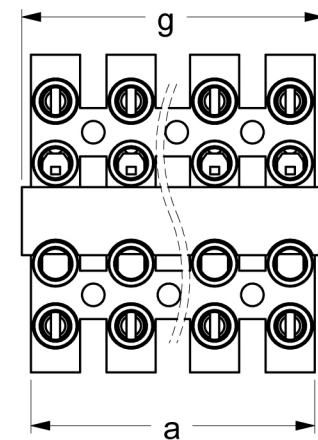



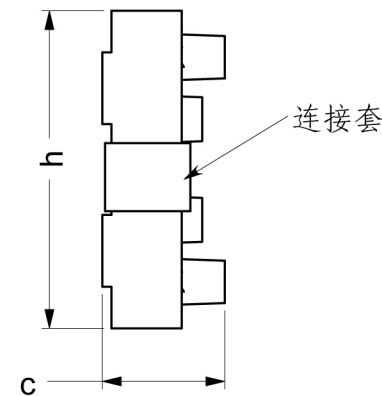

横插结构



连接套



型号选择:     -  /   ()

型号 | 夹紧件类型 | 接驳形式 | 连接套 | 极数 | 颜色 | 包装标记 | 夹紧件装配形式

HIM 惠华 苏州惠华电子科技有限公司

250、260系列接驳式接线端子